

**SMD3535**  
**— BLACK BODY / WHITE FACE**  
**HIGH CONTRAST**


## APPLICATION:

Purposed for outdoor fixed installations such as billboards or monument work, the ODX-P8S Outdoor offers high resolution video while retaining enough dependability and fortitude to withstand harsh conditions. With the backbone to handle inclement weather and a stunning image output that rivals its indoor-rated counterparts the ODX-P8S Outdoor is a flexible LED solution for nearly any fixed outdoor application.

## TECHNICAL SPECIFICATIONS

- Pixel Pitch: 8mm
- Drive Method: 1/4
- LED Type: SMD3535
- Brightness:  $\geq 5,000\text{cd/m}^2$
- Pixel Density: 15,625 pix/m<sup>2</sup>
- Viewing Angle: 120°H and 120°V
- Module Size: 256w x 128h mm (10.08 x 5.04 in)
- Cabinet Size: 1024w x 768h mm (40.31 x 30.24 in)
- Cabinet Weight: 43kg (94.79 lbs)
- Cabinet Material: Sheet Metal
- Average/Max Power Consumption: 300W/900W
- Refresh Rate:  $\geq 1920\text{HZ}$
- Voltage : 110-240V
- IP Rating: IP65
- Operating Temperature : -20 - 50°C
- Life Span (hrs):  $\geq 50,000$
- Compliance Standard: CE, RoHS, CCC
- Typical Control System is NovaSTAR

FRONT ▶

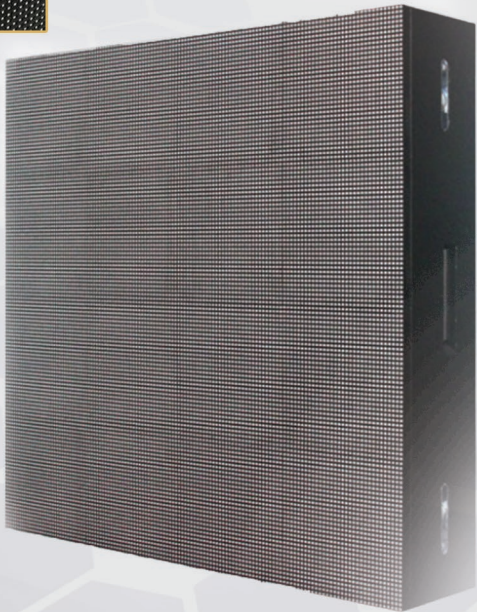

◀ REAR



## FOR MORE INFORMATION:

**HIVELED.COM**  
**(800) 606-6165**